
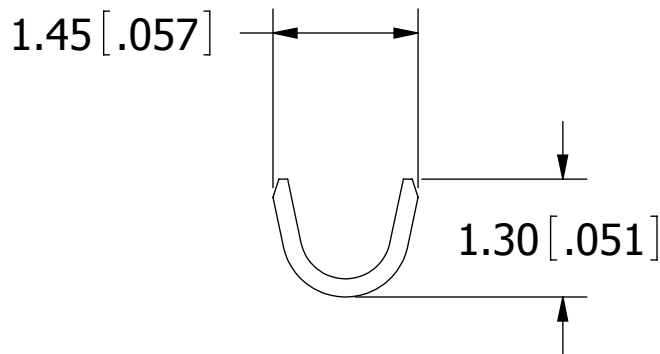
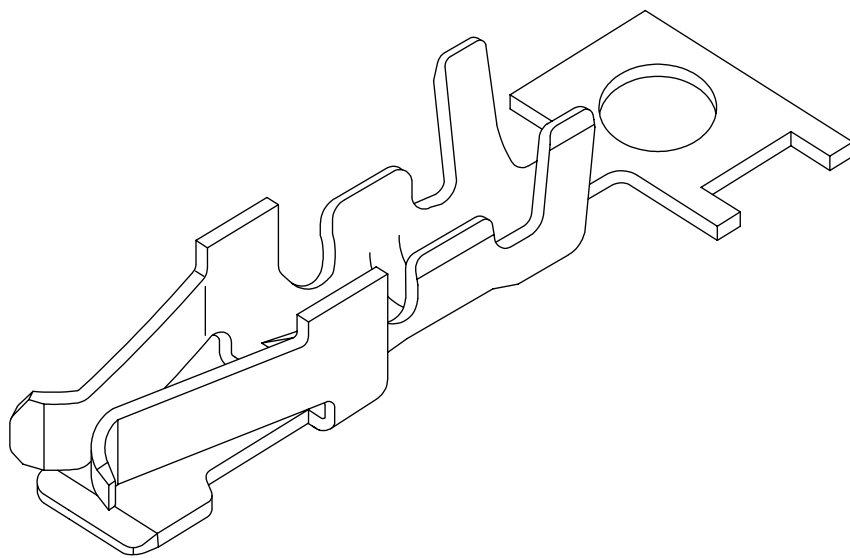



PART NUMBER CODING
SWT204-UP N-S01-UU-UU

PLATING

T = .000015" MIN NICKEL UNDERPLATE, .000040" MIN PURE TIN, BRIGHT OVERALL (NOTE 7)
P = .000040" MIN NICKEL UNDERPLATE, GOLD FLASH OVERALL.

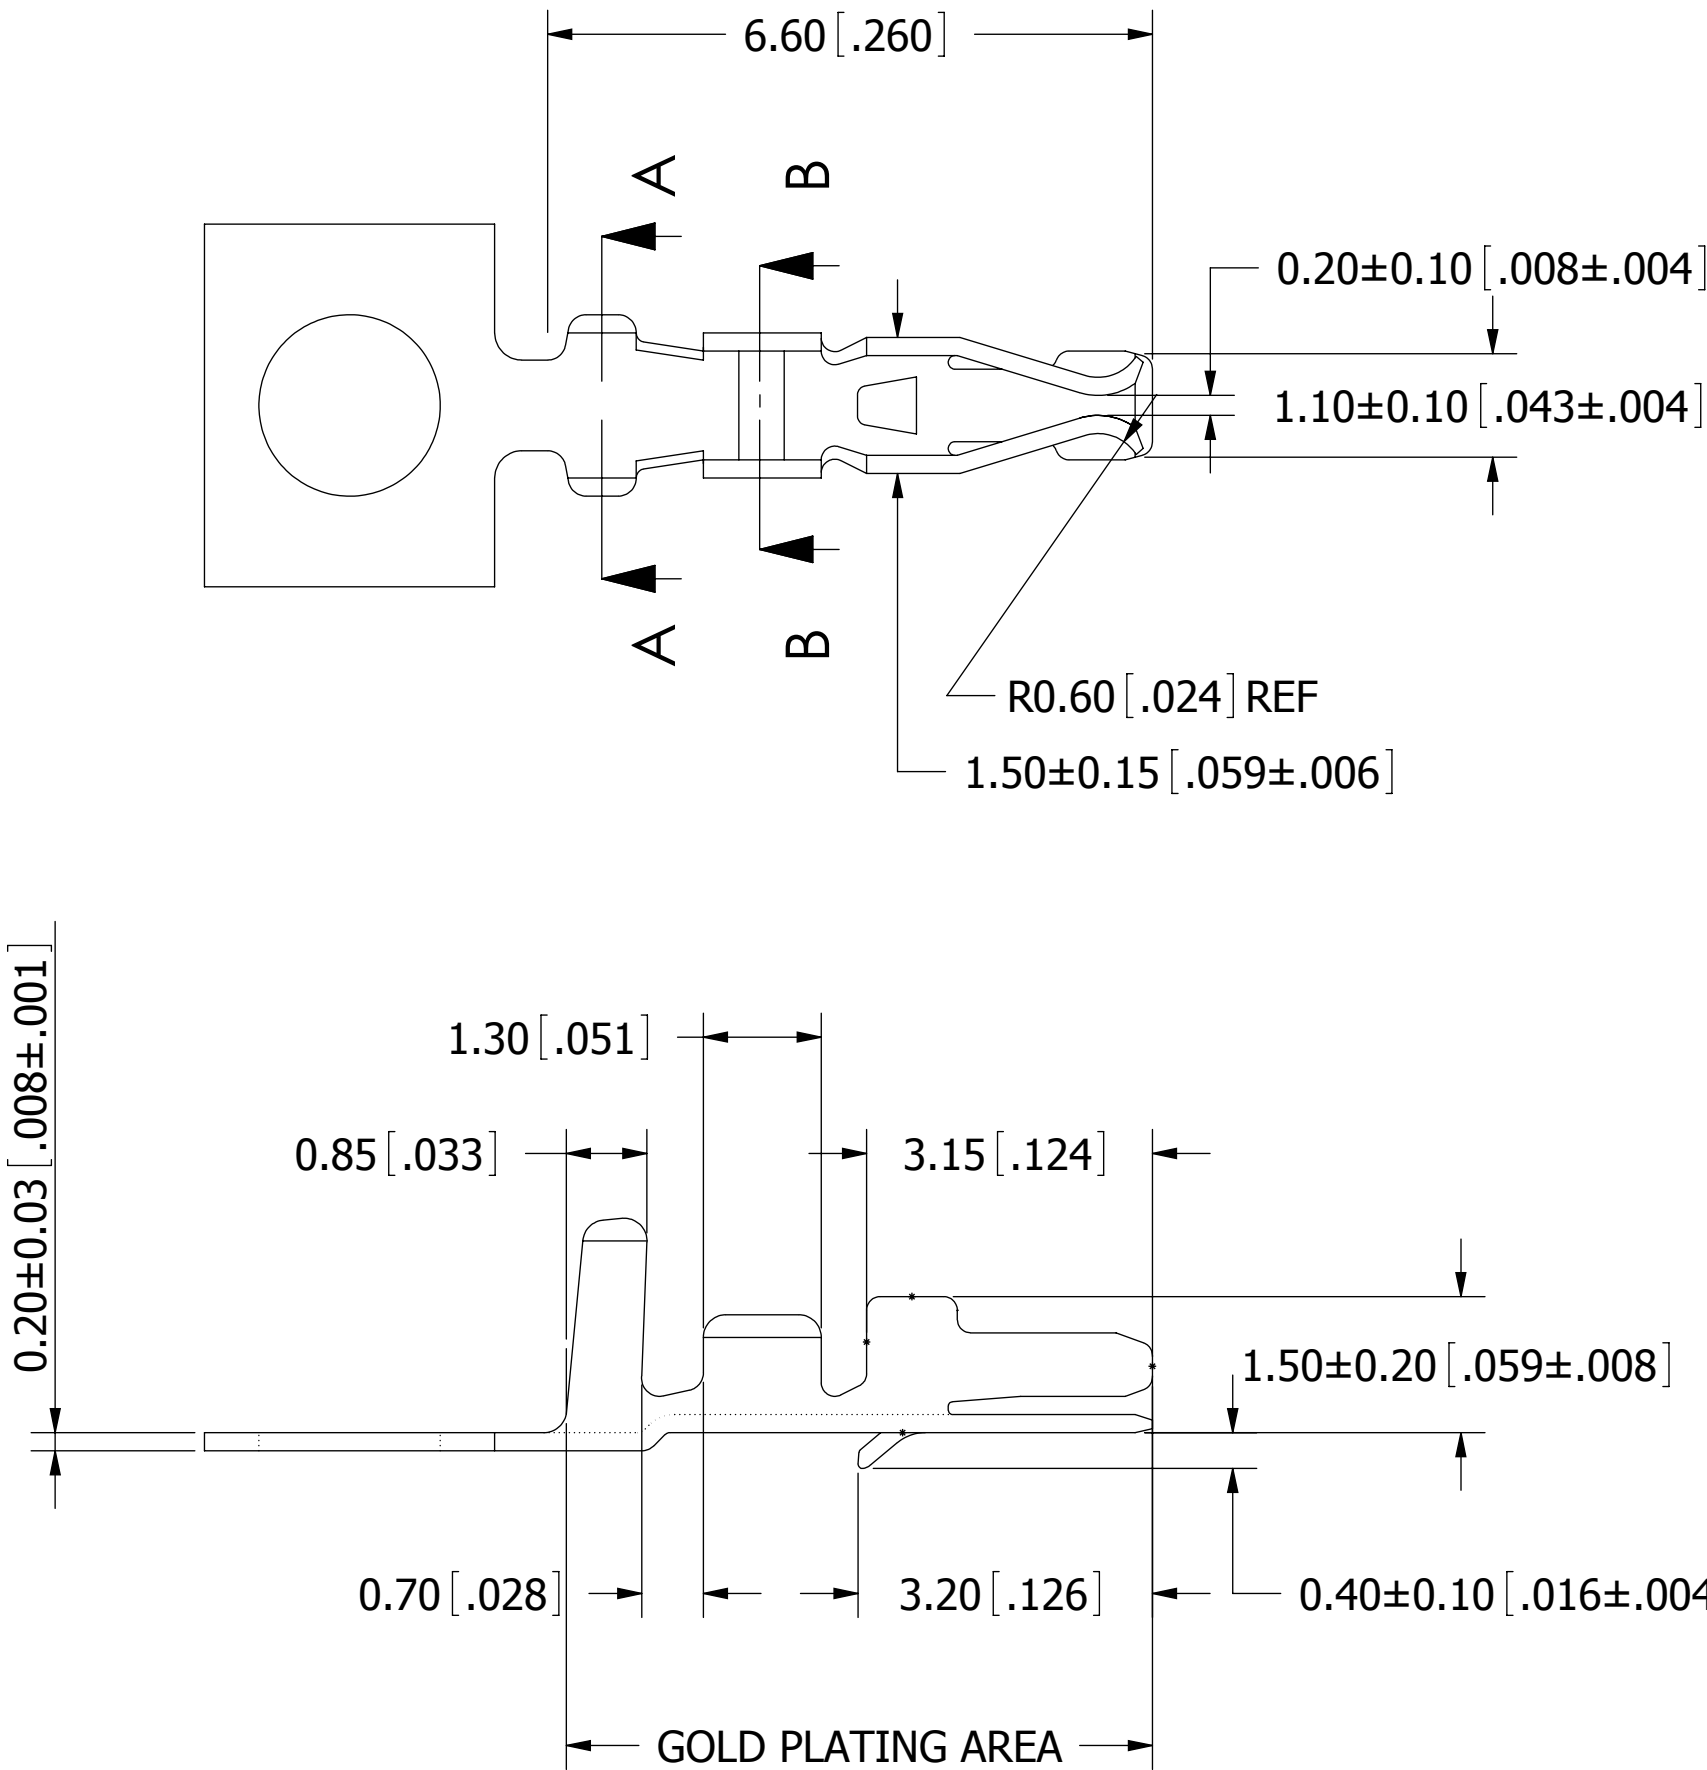


SECTION B-B

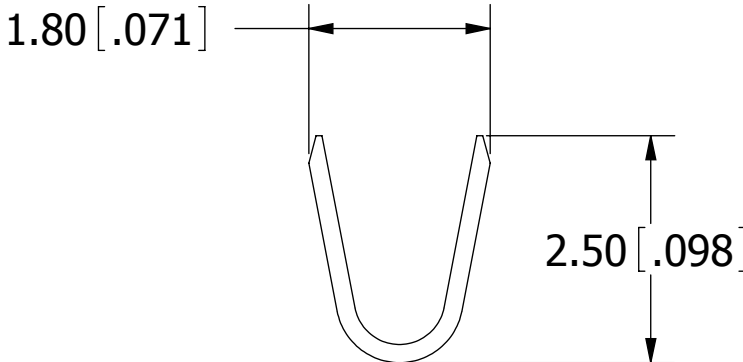


SECTION A-A

- NOTES:
1. MATERIAL: PHOSPHOR BRONZE.
 2. PLATING: SEE PART NUMBER CODING.
 3. WIRE RANGE: AWG #22 - #26.
 4. INSULATION O.D.: ϕ 1.35mm ~ ϕ 1.70mm.
 5. QUANTITY PER REEL = 10,000 PIECES.
 6. USED IN SWH204 SERIES HOUSING.
 7. PLATING BEFORE STAMPING/FORMING.



RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MM[INCHES]	DRAWN	DATE	NAME				
		05/24/2011	LH				
	TOLERANCES: ANGULAR: .X= ± 0.3 [.01] .XX= ± 0.30 [.012]	THE INFORMATION HEREIN CONTAINS PROPRIETARY INFORMATION OF SULLINS ELECTRONICS AND IS NOT TO BE REPRODUCED, USED OR DISCLOSED TO OTHERS FOR ANY PURPOSE EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY AN OFFICER OF SULLINS ELECTRONICS.			TITLE		
					CRIMP TERMINAL - SWH 204		
INTERPRET DIMENSIONS AND TOLERANCING PER: ASME Y14.5M-2009				PART NUMBER			
				SWT204-UP_N-S01-UU-UU			
				SIZE	CAGE CODE	DWG. NO.	REV
	C	54453		11627		A	
	SCALE: 12:1			SHEET 1 OF 1			