
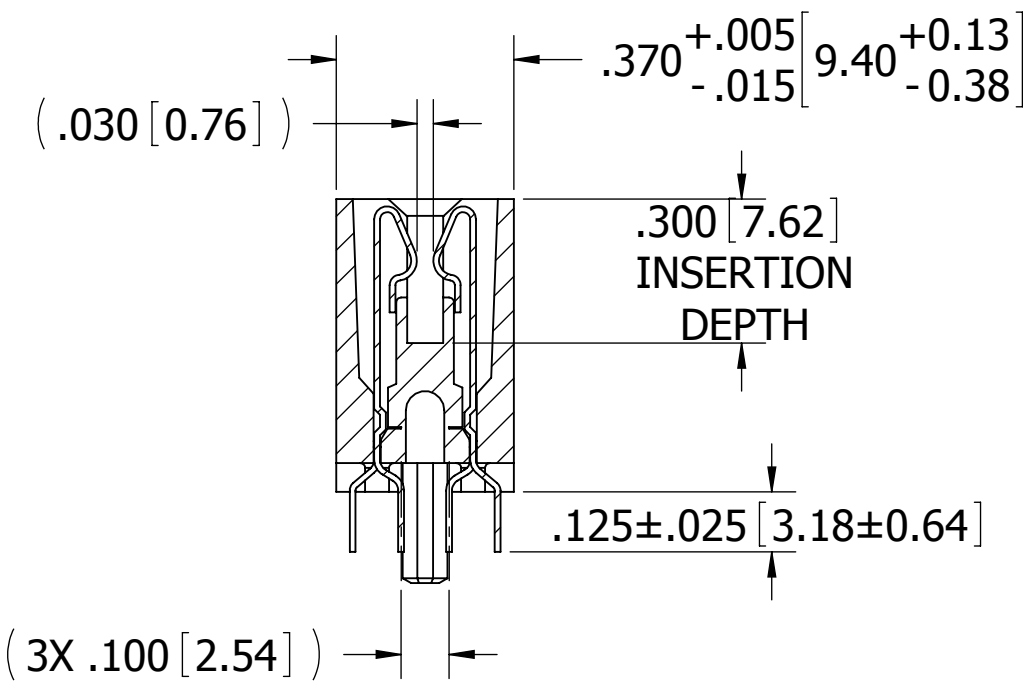


REVISIONS				
REV.	ECO. NO	DESCRIPTION	DATE	BY
A	780	INITIAL RELEASE	11/02/05	MNH
B	2502	ADDED MATERIALS A, G, & J, ADDED T MOUNTING	12/6/2011	SE
C	3394	UPDATE DWG FORMAT, UPDATE RECOMMENDED DAUGHTER CARD LAYOUT DIMS ON CUSTOMER COPY, UPDATE MODIFICATION NOTE	03/02/2016	MG

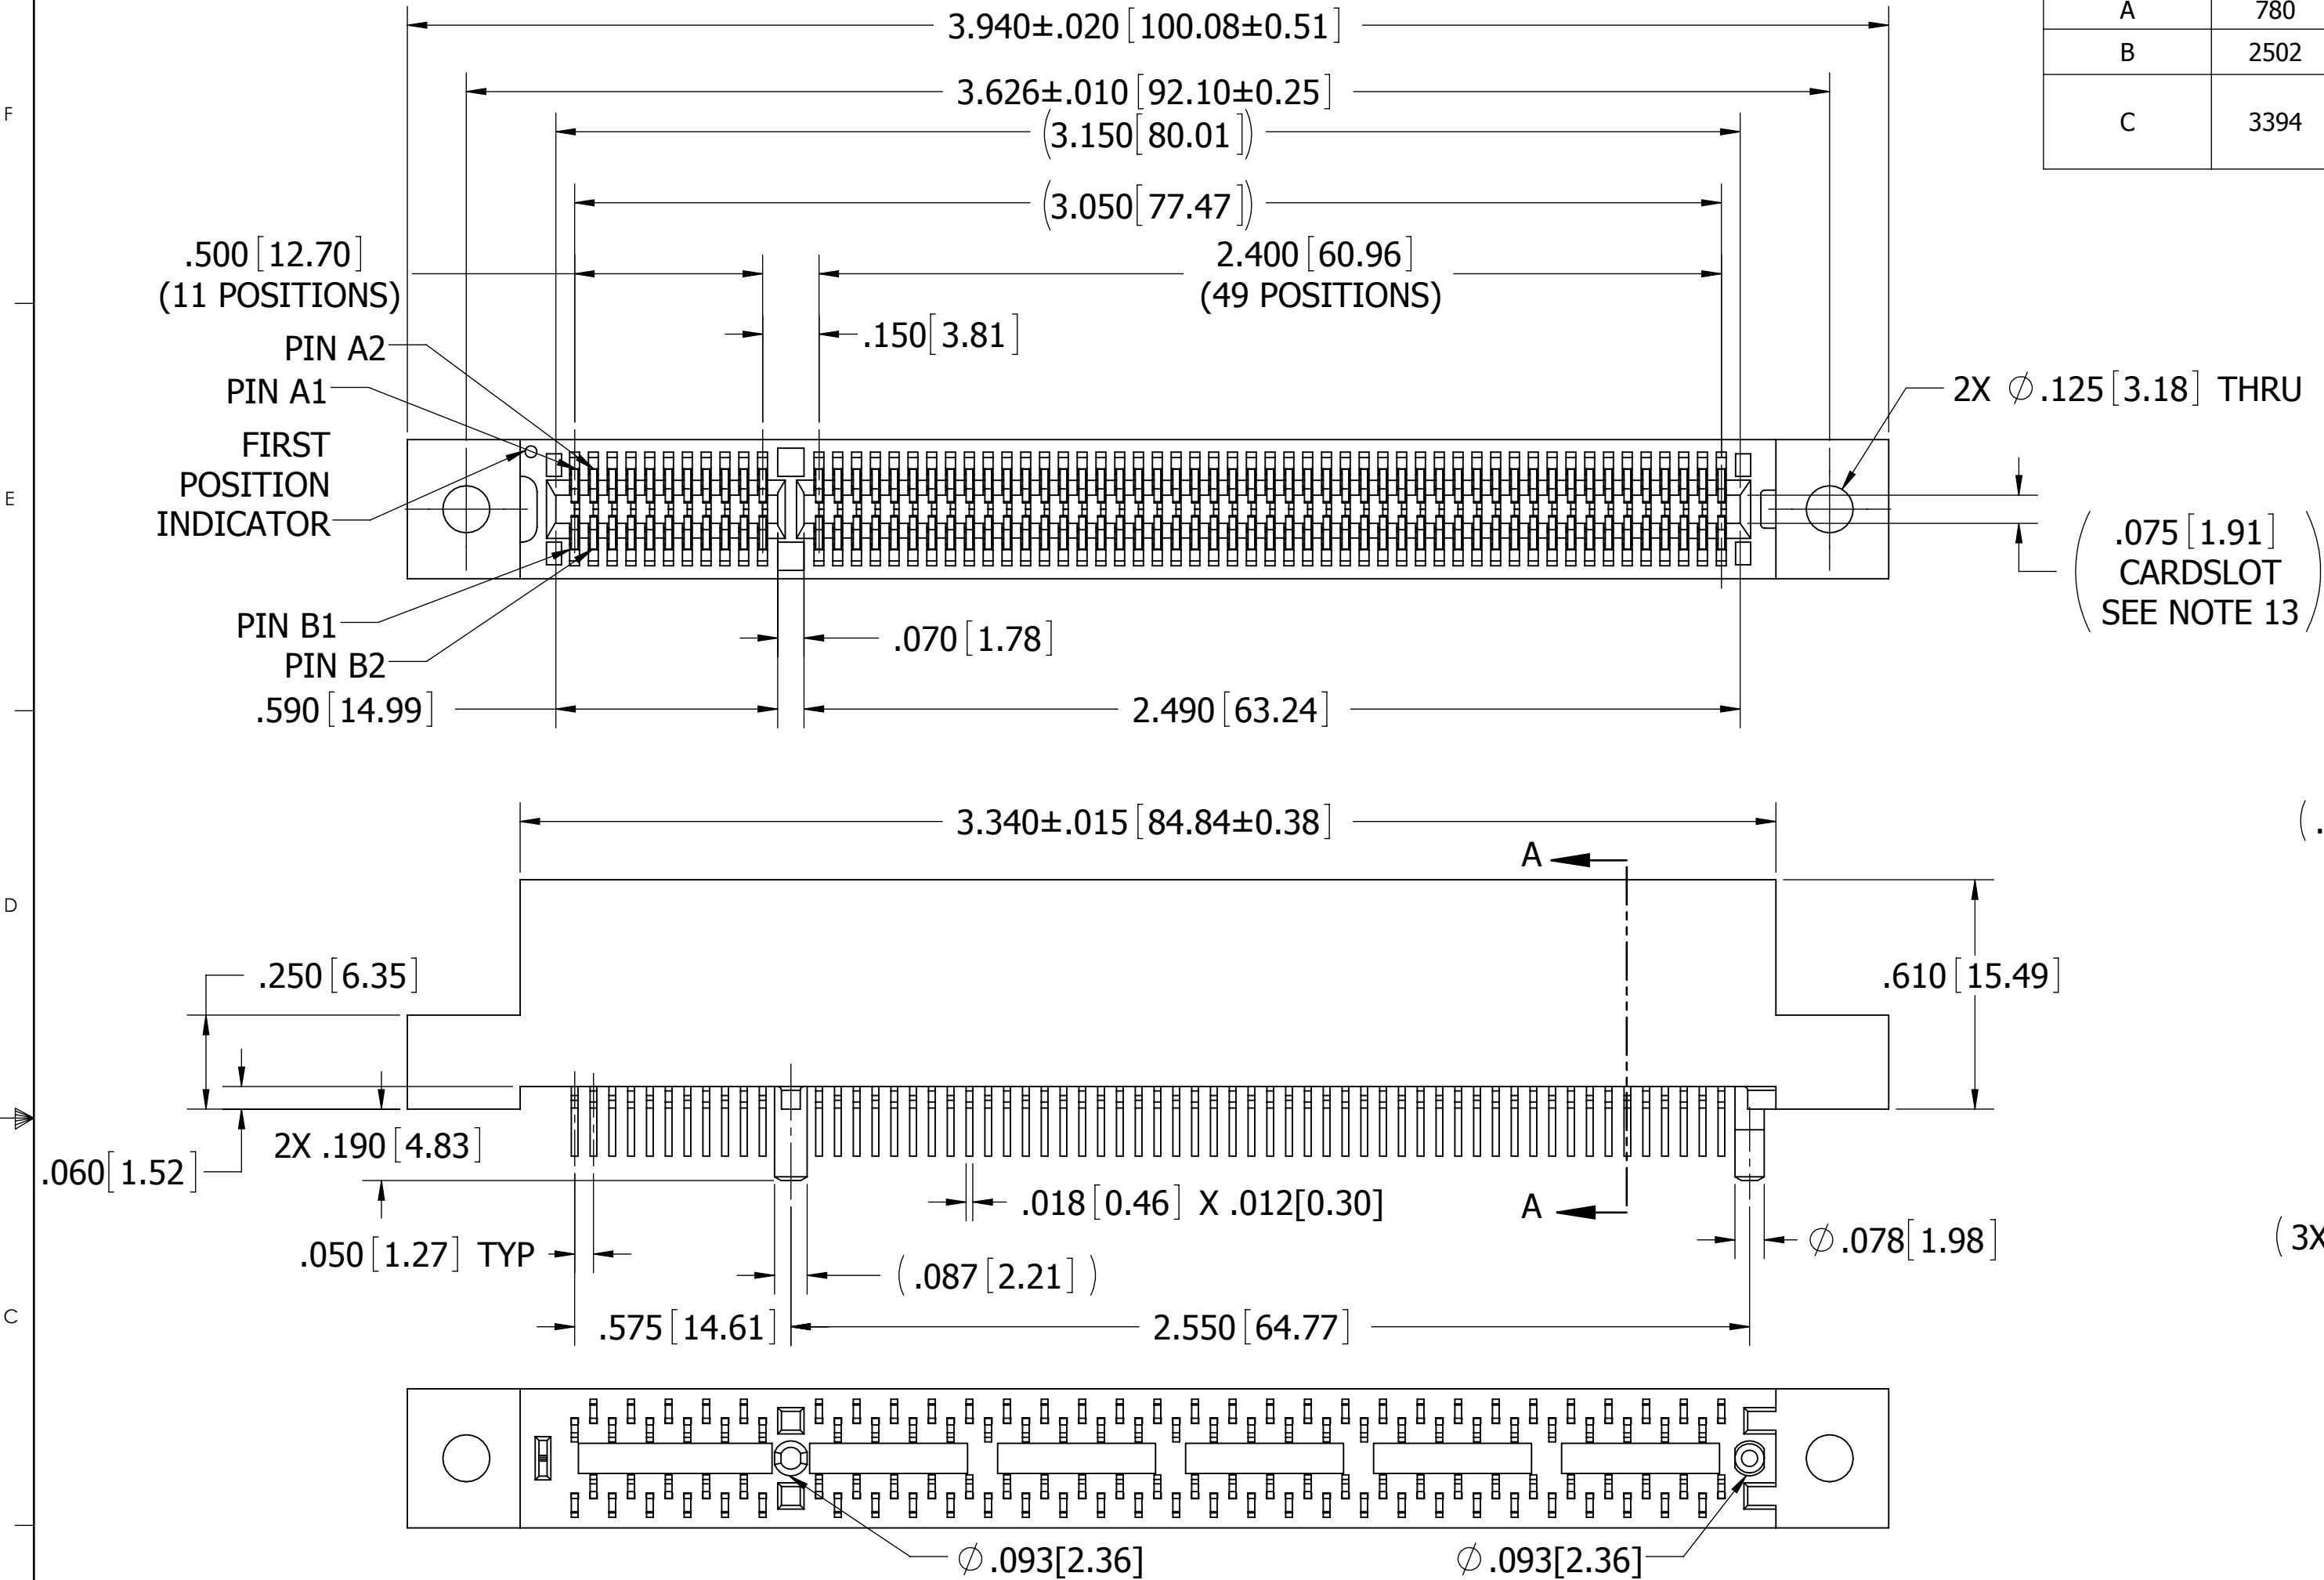


SECTION A-A

- NOTES:
1. INSULATOR MATERIAL: SEE PART NUMBER CODING
 2. CONTACT MATERIAL: SEE PART NUMBER CODING
 3. PLATING: SEE PART NUMBER CODING
 4. OPERATING TEMPERATURE: SEE PART NUMBER CODING
 5. PROCESSING TEMP: SEE PART NUMBER CODING
 6. UL FLAMMABILITY RATING: 94V-0
 7. OPERATING VOLTAGE: 300 VAC
 8. CURRENT RATING: 1 AMP
 9. CONTACT RESISTANCE: 30 MILLI OHMS MAX
 10. INSULATION RESISTANCE: 5000 MEGA OHMS
 11. DURABILITY: 500 CYCLES MINIMUM
 12. CONNECTOR IDENTIFICATION: THE PART SHALL BE MARKED WITH A PART NUMBER AND LOT CODE
 13. BOARD THICKNESS ACCOMMODATED: .062±.008[1.57±0.20]
 14. INSERTION FORCE: 6 OZ MAX PER CONTACT PAIR WHEN USING A .062[1.57] TEST BLADE
 15. WITHDRAWAL FORCE: 1/2 OZ MIN PER CONTACT PAIR USING .062[1.57] TEST BLADE
 16. MODIFICATION: CARDSLOT BARRIERS WITH GUIDE POSTS FOR PCI 32 BIT, 3.3 OR 5 VOLT 60 (11/49) POSITION CONNECTOR (ROTATE BOARD 180° FOR CONVERISON 3.3 TO 5 VOLTS)

-- B60DHHD-S578



CUSTOMER COPY

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM]	DRAWN	DATE	NAME			
		11/02/05	MNH			
	TOLERANCES: ANGULAR: ± 1° DECIMALS .XX=± .02 [.5] .XXX=± .005 [.13] .XXXX=± .0005 [.013]	THE INFORMATION HEREIN CONTAINS PROPRIETARY INFORMATION OF SULLINS ELECTRONICS AND IS NOT TO BE REPRODUCED, USED OR DISCLOSED TO OTHERS FOR ANY PURPOSE EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY AN OFFICER OF SULLINS ELECTRONICS.			TITLE EDGECARD, .050 CC HP	
				PART NUMBER __ B60DHH _ -S578		
	SIZE C		CAGE CODE 54453		DWG. NO. C10586	REV C
	SCALE: 2.5:1				SHEET 1 OF 2	

