

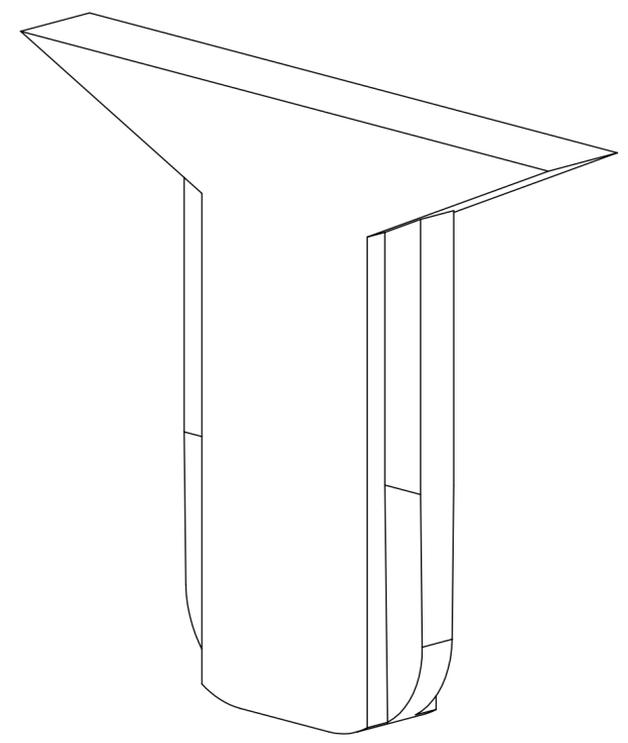
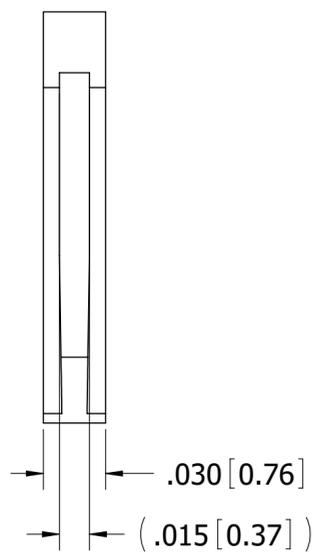


PART NUMBER CODING				
SULLINS	MICRO PLASTICS	MATERIAL	CONNECTOR OPERATING TEMP	CONNECTOR PROCESSING TEMP
PLA-K1	04-0003-000	WHITE PBT	-65°C TO +125°C	WAVE/MANUAL SOLDERING
GLA-K1	44-0003-000	BLACK PA9T	-65°C TO +150°C	260°C MAX FOR 20 SECONDS
RLA-K1	14-0003-000	BROWN PPS	-65°C TO +200°C	260°C MAX FOR 20 SECONDS

REVISIONS				
REV.	ECO NO.	DESCRIPTION	DATE	BY
C	4201	UPDATED DIMENSION TOLERANCES	4/22/2020	TT

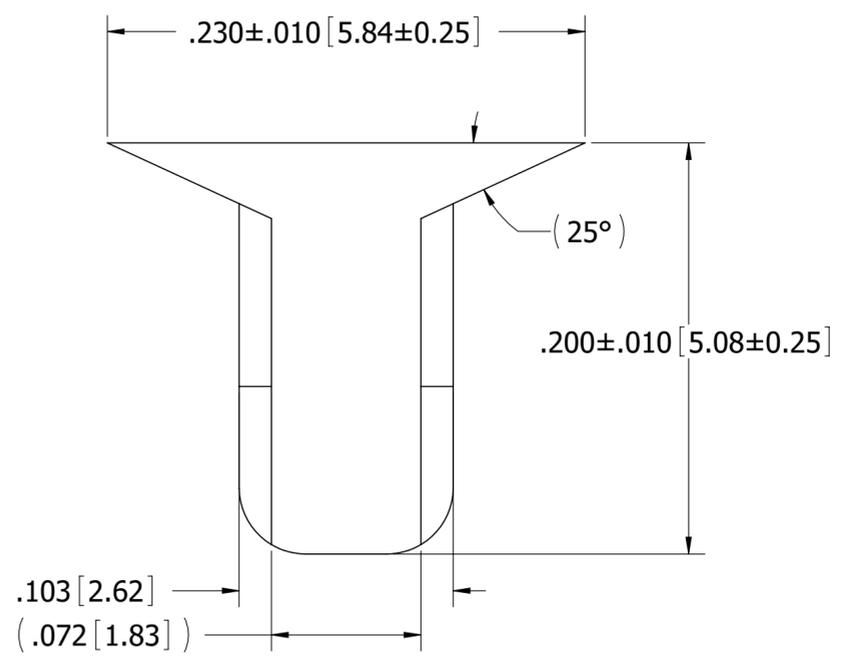

CUSTOMER COPY

NOTES:
1. MATERIAL: SEE PART NUMBER CODING



UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM]		DRAWN	DATE	NAME	
TOLERANCES: ANGULAR: ± 1° DECIMALS .XX= ± .02 [.5] .XXX= ± .005 [.13] .XXXX= ± .0005 [.013]		10/04/16	MG		
<small>THE INFORMATION HEREIN CONTAINS PROPRIETARY INFORMATION OF SULLINS ELECTRONICS AND IS NOT TO BE REPRODUCED, USED OR DISCLOSED TO OTHERS FOR ANY PURPOSE EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY AN OFFICER OF SULLINS ELECTRONICS.</small>					TITLE POLARIZING KEY
					PART NUMBER _LA-K1
SIZE	CAGE CODE	DWG. NO.		REV	
C	54453	C13097		C	
SCALE: 32:1				SHEET 1 OF 1	